

Pro-Streamer Web Update:

Firefox Pro Audio Streamer - Send 192.168.0.198

SONIFEX PS-SEND Manufacturers of audio and video equipment

V1.015
MAC address: 00:08:E1:02:3F:49
IP address: 192.168.0.198
Netmask: 255.255.255.0
Default gateway: 192.168.0.149

Basic Settings | Advanced Settings | Update

BASIC SETTINGS

AUDIO SETTINGS

Input source: Analogue XLR

ENCODING

Encoding: MPEG2
Sample Rate: 22.05kHz
Channel Mode: Stereo
MPEG Encoding quality: 7 Highest

STREAM SETTINGS

Streaming mode: send always
Connection type: RTP
IP Address: 192 . 168 . 0 . 35
Port No.: 4444

Status block

Sending status
The last recorded status of the unit and it shows either SENDING or INACTIVE.

Analogue peak input values
The last recorded peak input value displayed in dBs for both channels.

GPI Status
The last recorded GPI input status. Grey box means currently open contact. Green box means currently closed contact.

Basic settings

Input Source
Select the input source that will be used by clicking on the appropriate radio box. Only one can be selected at a time.

Channel Mode
Select whether the source is Stereo or Mono. If mono is selected, both left and right channels of the network stream contain left channel data. The stream becomes dual-mono.

Encoding
Choose one of the encoding methods and sample rates. Please note that G.711 and PCM have set bit rates while MPEG is variable. The quality drop box only affects MPEG encoding and determines the overall bit rate. If using the digital inputs, MPEG-1 will be used and the sample rate will be detected. The input sample rate is restricted to 32kHz, 44.1 kHz or 48kHz. To work out the bit rate for G.711 and PCM, simply

Unit Status:

Sending Status: SENDING
Analogue Input Peak Value L: 18
Analogue Input Peak Value R: 17

GPI Status:

Input 1
Input 2
Input 3
Input 4
Input 5
Input 6

Sonifex Ltd. 61 Station Road, Irthlingborough, Northants, NN9 5QE, UK. Tel: +44 (0)1933 650700 Fax: +44 (0)1933 650726 EMail: sales@sonifex.co.uk

Click Update

Firefox Pro Audio Streamer - Send 192.168.0.198

SONIFEX PS-SEND Manufacturers of audio and video equipment

V1.015
MAC address: 00:08:E1:02:3F:49
IP address: 192.168.0.198
Netmask: 255.255.255.0
Default gateway: 192.168.0.149

Basic Settings | Advanced Settings | Update

UPDATE FIRMWARE

Please visit our [software downloads](#) page for firmware updates.

[Please click here to continue](#)

Update

Use this facility to update the firmware through the internet. Once the link is clicked the unit will reboot and load the bootloader. From here:

- Click on the browse button.
- Locate and click on new update file, entitled "compound.bin".
- Click upload button.
- Reboot the unit.

Please keep watch for updates at [our website](#).

Unit Status:


Sending Status: SENDING
Analogue Input Peak Value L: 18
Analogue Input Peak Value R: 17

GPI Status:


Input 1
Input 2
Input 3
Input 4
Input 5
Input 6

Sonifex Ltd. 61 Station Road, Irthlingborough, Northants, NN9 5QE, UK. Tel: +44 (0)1933 650700 Fax: +44 (0)1933 650726 EMail: sales@sonifex.co.uk


If you already have a
firmware file click
click here to continue

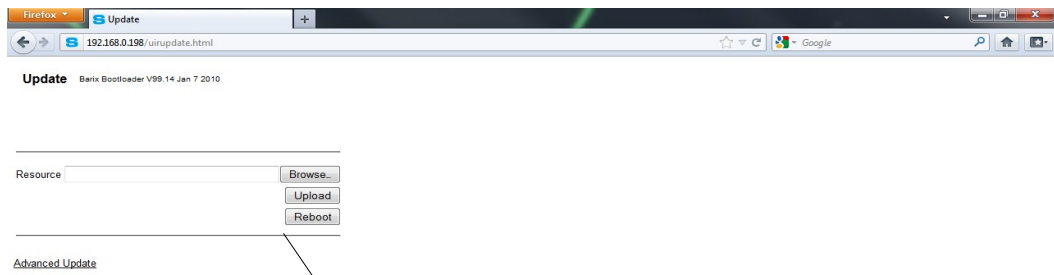

To locate the firmware file click browse

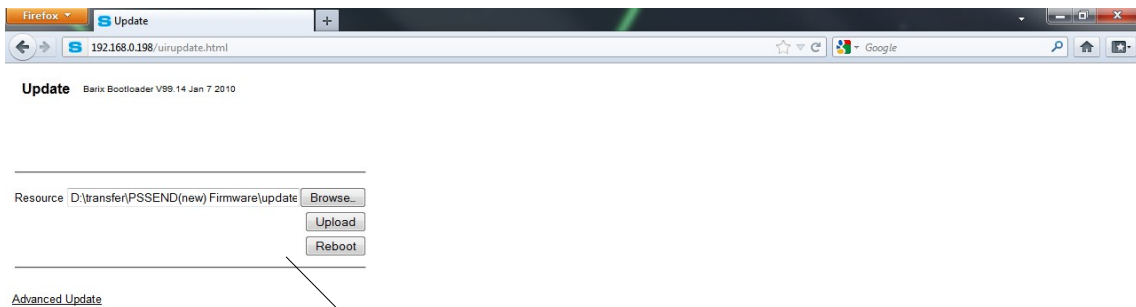

Click upload to upload the file and wait until the next screen appears

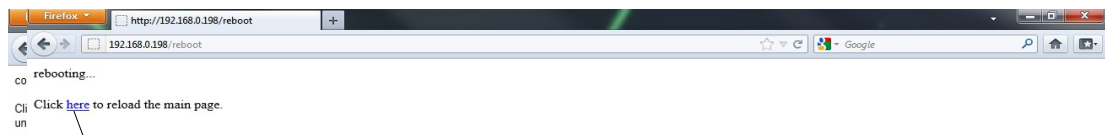

Click to reload main page.